


BUTYLEN-R20 MP

Product information



Special advantages:

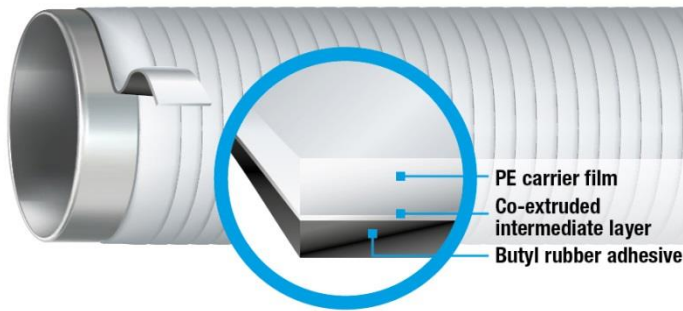

For temperatures up to +85°C (+185°F).



DIN-DVGW certified with BUTYLEN-AS30.



Excellent mechanical protection.



UV-stabilised.



Excellent price/performance point.



Compatible with factory coatings made from PE, PP, FBE, PU, CTE and bitumen.

A genuine co-extruded 2-ply plastic tape, made from a stabilized polyethylene carrier material with a butyl rubber adhesive on one side.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

BUTYLEN-R20 MP is a co-extruded 2-ply plastic tape made from a stabilized polyethylene carrier material with a butyl rubber coating.

BUTYLEN-R20 MP is used in **BUTYLEN** corrosion protection systems as the outer tape, where it provides reliable mechanical protection for the inner 3-ply tape.

The butyl rubber coating of the BUTYLEN-R20 MP tape fuses together completely with the outer layer of the

3-ply inner tape to form a reliable and leak-proof bond between the inner and outer tape.

Despite its relatively low thickness of ≥ 0.5 mm, BUTYLEN-R20 MP exhibits outstanding resilience and impact strength, resulting in excellent impact resistance and indentation resistance for the field-joint coating system.

As an outer tape, BUTYLEN-R20 MP is an integral part of the

BUTYLEN-AS30/ -R20 MP system, which is DIN/DVGW-certified for a stress class of B 50 according to EN 12068 (reg. no.: NG-5180CP0056).

BUTYLEN-R20 MP is compatible with factory coatings made from PE, PP, FBE, PU, CTE and bitumen.

BUTYLEN-R20 MP can be processed efficiently with **DEKOMAT**[®] wrapping machines.

Typical product properties

Property	Unit	Typical value	Test method
Carrier film color	-	white	-
Butyl adhesive color (inner)	-	black	-
Tape thickness	mm	≥ 0.5	ISO 4591 ASTM D1000
Carrier film thickness (approx.)	mm	≥ 0.3	
Inner adhesive layer thickness (approx.)	mm	≥ 0.2	
Elongation at break	%	≥ 550	DIN 30672 EN 12068
Tape strength	+23°C (+73°F) N/cm	≥ 65	
Dielectric strength	kV/mm	≥ 35	DIN 53481
Water absorption 1 day/30 days	+23°C (+73°F) %	≤ 0.1 / ≤ 0.4	-
Operating temperature	°C (°F)	-40 to +50 (-40 to +122)	-
Design temperature	°C (°F)	-50 to +85 (-58 to +185)	-

BUTYLEN tapes can easily be applied by hand. Application is even more efficient with original **DEKOMAT**[®] wrapping machines. For **BUTYLEN** tapes with widths >50 mm, we recommend the deployment of a **DEKOMAT**[®] wrapping machine, to ensure that the final workmanship is of a superior and uniform quality.

Ordering information and packaging

	Diameter of inner core (mm)	Roll length (m)	Roll width (mm)	Contents per box			
				Number of rolls	Total tape length (m)	Total tape area (m ²)	Weight (approx.) (kg)
BUTYLEN-R20 MP	41	30	50	12	360	18	11
			100	6	180	18	11
			150	6	180	27	17
	78	70	100	3	210	21	13
			150	2	140	21	13

Other dimensions available on request.

Storage

When stored in its original, unopened packaging, **BUTYLEN-R20 MP** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.

DEKOTEC GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany

Phone: +49 214 2602-0

www.dekotec.com | info@dekotec.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.dekotec.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

03.2019