





TOK[®]-Band Spezial DR



Product Information

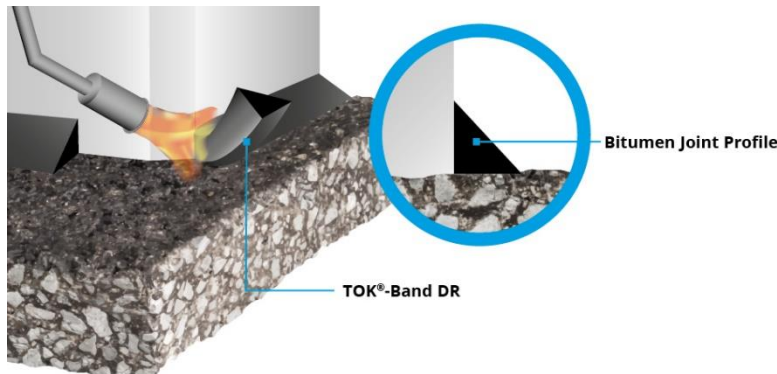

Special Advantages:

-  Tested in accordance with TL/TP Fug-StB.
-  Outstanding quality.
-  Quick, economical installation.

Bituminous tape with a triangular cross-section: ideal for forming fillets for bitumen waterproofing sheets at corner joints/upstands.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Product Description

TOK[®]-Band Spezial DR is a high-quality bitumen joint tape made of polymer-improved road bitumen, which has excellent properties in terms of elasticity

and adhesion.

TOK[®]-Band DR is available as a joint tape that is heated for application or is self-adhesive.

TOK[®]-Band Spezial DR and its associated primer, **CORRISOL[®]-Spezial**, have been tested in accordance with TL/TP Fug-StB and meet these regulations in full.

Product Usage

TOK[®]-Band Spezial DR is used for sealing work in conjunction with poured asphalt or rolled asphalt.

roofing and sealing sheets, e. g. for flashings and cappings of parking decks or on flat roofs.

permanent, tightly-sealed joints are guaranteed.

The triangular profile is also particularly suited for use as a wedge for bitumen

Due to its excellent material properties,

Typical Material Properties (Test results in accordance with TL/TP Fug-StB)

Test	Unit	Result	Requirement
Softening point (ring and ball)	°C/°F	> +100 (+212)	> +90 (+194)
Cone penetration	0.1 mm	35	20-50
Elastic recovery	%	10-30	10-30
Cold flexural behaviour	°C/°F	-9 (+15.8)	≤ ±0 (+32)
Adhesion and extensibility	%, N/mm ²	≥ 10 / ≤ 1.0	≥ 10 / ≤ 1.0

Product Application

Preparation of the connecting edges

According to the requirements of ZTV Fug-StB, the surfaces must be dry, clean and solid, and an undercoat of primer must have been applied. An undercoat or primer appropriate for the joint tape must be used.

For **TOK®-Band Spezial DR**, the bituminous primer **CORRISOL®-Spezial** (colour: black) has been developed.

The air drying time for **CORRISOL®-Spezial** in summer is approximately 10–20 minutes.



Installation of TOK®-Band Spezial DR

As soon as the primer coat has dried, the joint tape can be laid.

Before application, the joint tape is laid out along the wall with the anti-adhesive paper upwards.

The release paper should be removed just before it is laid.

The **fusible TOK®-Band Spezial DR** is heated using a gas burner until the surface becomes tacky.

It is then pressed immediately onto the edge flanges.

The heated strip can be moulded into corner areas with a spatula or similar implement.

Ordering Information and Packaging

TOK®-Band Spezial DR is delivered rolled up.

The rolls are packed and delivered in boxes with the dimensions (W x D x H) of 370 mm

x 370 mm x 160 (or 144) mm. Rolls are separated with silicone paper.

A total of 30 boxes are packed onto one Euro pallet (800 x 1200 mm).

The quantity per box and per pallet depends on the cross-sectional dimensions of **TOK®-Band Spezial DR**.

Fusible TOK®-Band Spezial DR

Strip*	Order number	m/box	m/pallet
20 x 20	on enquiry	30.00	900.00
25 x 25	on enquiry	22.00	660.00
25 x 30	on enquiry	16.00	480.00
30 x 30	on enquiry	14.00	420.00
* Other strip dimensions also available on enquiry			

Storage

Store dry and frost-free; do not stack boxes.

Under these conditions,

TOK®-Band Spezial DR can be stored in its sealed original packaging for at least 3 years from the date of manufacture.

DEKOTEC GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@dekotec.com
www.dekotec.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.dekotec.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, shall be decisive. The legal relationship shall be governed by German law.

08.2022